

AIR OPERATED LOCKING DIFFERENTIAL

RD232

Toyota 8.9" RR, 32 SPL, 12 bolt RG, Shim Adjusted

PARTS L	.IST			
ITEM#	QTY	DESCRIPTION	PART#	NOTES
01	1	FLANGE CAP KIT	027348SP	
02	1	BONDED SEAL	160702SP	
03	1	CLUTCH GEAR & WAVESPRING KIT	050906SP	
04	2	SIDE GEAR THRUST WASHER	SEE NOTE	3
05	1	SPLINED SIDE GEAR	SEE NOTE	2
06	2	SHORT CROSS SHAFT	060403SP	
07	1	SIDE GEAR	SEE NOTE	2
08	1	DIFFERENTIAL CASE	013048SP	
09	1	COUNTERSUNK SCREW (PK OF 2)	200213SP	
10	1	RETAINING PIN SET (PK OF 4)	120601SP	
11	1	SHIM KIT	SHK003	
12	1	SHIM KIT	SHK009	
13	1	SEAL HOUSING KIT	081814SP	
14	1	SEAL HOUSING O-RINGS (PK OF 2)	160207SP	1
15	1	TAPERED ROLLER BEARING	NOT SUPPLIED	4
16	1	WAVESPRING	150706SP	
17	1	LONG CROSS SHAFT	SEE NOTE	
18	1	SPIDER BLOCK	070201SP	
19	4	PINION GEAR	SEE NOTE	
20	4	PINION THRUST WASHER	SEE NOTE	3
*	1	BULKHEAD FITTING KIT (BANJO TYPE)	170114	5
*	1	AIR LINE (6mm DIA X 6m LONG)	170314SP	5
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	2102232	

NOTES

- 1 For replacement O-rings use only BS136 Viton 75.
- 2 Available only as complete 6 gear set # 728H201
- 3 Available only as complete thrust washer kit #730H01
- 4 Toyota OEM carrier bearing PN: 90366-T0068 (Flange Cap Side, LHS) 90366-T0071 (Diff Case Side, RHS)
- 5 All diffs produced before serial #17070001 came with 5mm air connection system. For information contact ARB.




^{*} Not illustrated in exploded view



AIR OPERATED LOCKING DIFFERENTIAL

RD232

Toyota 8.9" RR, 32 SPL, 12 bolt RG, Shim Adjusted

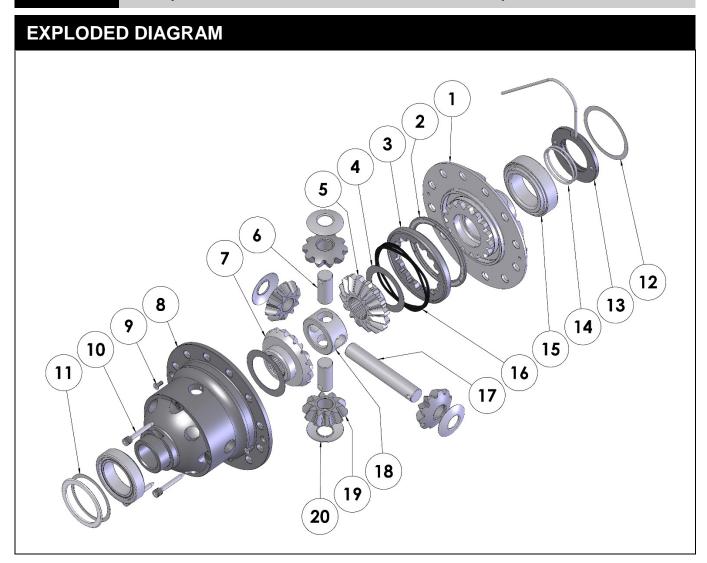

SPECIFICATIONS

Axle Spline 32 tooth, Ø34.8mm [1.37"]

Ratio Supported All

Ring Gear ID 140.95mm [5.55"] Ring Gear OD 225mm [8.86"]

Ring Gear Bolts 12 bolts on Ø162.5mm [6.40"]

Ring Gear Torque 137Nm [101 ft-lb]

Backlash 0.15-0.25mm [0.006-0.010"]

Bearing Cap Torque 113Nm [83 ft-lb]